

Australian Data Sheet



Designed for Australian use by **MPglobal**

QUIETwarmth®

Radiant Heat Film for *FLOATING* Floors



Designed For
FLOATING FLOORS

All Floating floor

Laminate

Engineered Wood

Solid Wood

SPC Hybrid plank


Cork & Bamboo



QUIETWARMTH Radiant floor heating system is the ideal way to add even gentle heat to floors in kitchens, bathrooms, family rooms, sunrooms and new construction.



**Click on
the video →
to watch**

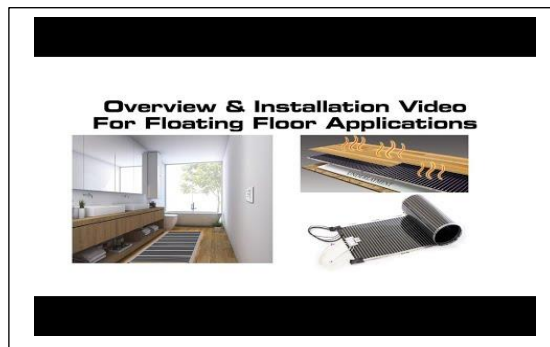

MPglobal

25 year

Limited

warranty

Installation Methods

Float Install only over

QUIETWALK^{Plus}

QUIETWALK[®]

Insulayment[®]

Suitable Substrates

Cured concrete

Compressed Cement sheeting

Plywood

Wood subfloors

MPglobal

25 Year Limited Warranty

MPglobal



Ultra-thin , conductive ink film technology – for floating floors including luxury vinyl and laminate hardwoods



Roll out installation – connect up to 14 m2 of mats wired parallel on 1 thermostat



Cut to fit length – simply cut along the dotted line



Ultra low EMF (electromagnetic frequency) levels



ETL listed for safety



Factory attached 4.5 meter electrical leads to each mat



Ready to install in 240v



Control Temperature with an available floor sensing thermostat



Energy efficient – radiates heat



Fast installation – simple roll out install

PRODUCT OVEVIEW

Quietwarmth Float radiant heat film for floating floors is an exciting new product from the manufacturers of Quietwalk underlayment. We have taken our vision to expand simplicity and quality by partnering with Calorqie's unique patented radiant heat technology. It is ideally suited for floating flooring materials like laminate, wood and luxury vinyl tile.

Installation Methods -

Floating Floors only

1. Roll out underlayment of choice – “ insulayment, quietwalk, quietwalk plus “ and butt seams together
2. Tape seams together with moisture barrier seam tape or seal with the adhesive strip on quietwalk plus
3. Install choice of floating floors systems over the top according to its manufacture
4. Follow the Quietwarmth installation manual to install the heat film and have a licensed electrician.

Technical Data

Weight - 51 grams / .092 m2

Thickness - 0.5 mm

Calorqie's unique patented radiant heat technology

Limitations

Quietwarmth float :

1. NOT SUITABLE for use under carpet, or glued and nailed down wood floors.
2. DO NOT install quietwarmth floating floor heat in walls
3. MUST be installed by qualified installers and wired by licensed electricians. (please read installation manual for this information)

Approved Floor Covering Materials

1. All floating floors
2. Laminate
3. Floating tiles
4. float engineered wood
5. Luxury vinyl tile
6. cork and bamboo (refer to the manufacturers for compatibility with radiant heat before installing.)

*please email our technical department for substrate compatibility if unsure. - info@auslayindustries.com.au

Packaging

Quietwarmth float is packaged in

2.78 m2- (914mm x 3048mm), 1.39 m2- (914mm x 1524mm), 0.69 m2- (457mm x 1524mm) films

Warranty

The Quietwarmth floating floor film is certified to the highest international standards and come with a

25 YEAR LIMITED WARRANTY

Easy Installation, install floating floor coverings the same day !



HEATED FLOORING FILM

DESIGNED FOR EASY INSTALLATION &
AVAILABLE FOR ALL FLOORING TYPES


[View Products](#)



QUIETwarmth®

Approved for use over

INSULAYMENT, QUIETWALK & QUIETWALK PLUS underlayments
Amazing Acoustic Properties and in combination with Quietwarmth ,
you have the perfect warm flooring system

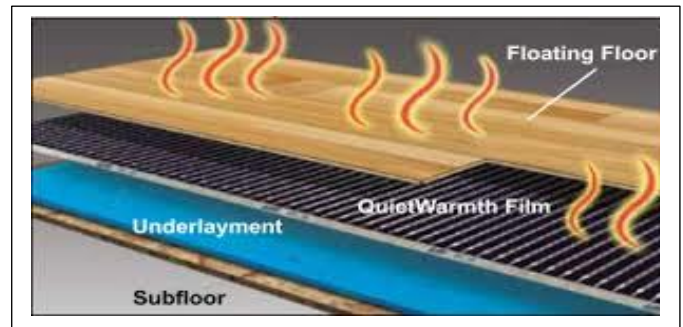

Please refer to the
Quietwarmth Float install manual before install here:

<http://www.auslayindustries.com.au>



Made in the USA by :
www.mpglobalproducts.com



Proudly imported and distributed in Australia By



www.auslayindustries.com.au

info@auslayindustries.com.au

04.02.2024