

Australian Data Sheet



Designed for Australian use by **MPglobal**

QUIETwarmth®

Peel n Stick Radiant Heat Film for GLUE DOWN Floors



Glue Down Flooring

Designed For
Glue down floors

Ceramic tiles

Porcelain tiles

Laminate

timber


OR FLOATING FLOORS



QUIETWARMTH Radiant floor heating system is the ideal way to add even gentle heat to floors in kitchens, family rooms, sunrooms and new construction.



*Click on
the video →
to watch*

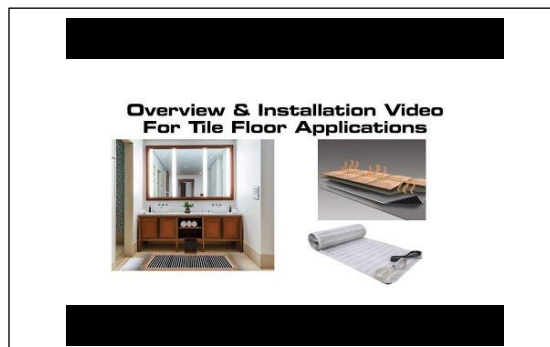

MPglobal

25 year

Limited

warranty

Suitable Substrates

Cured concrete

Compressed Cement sheeting

Plywood

Wood subfloors

MPglobal

25 Year Limited Warranty

MPglobal



Ultra-thin , conductive ink film technology – for tiled floors including ceramic, porcelain, stone , marble



Roll out installation – Peel n Stick application - connect up to 14 m2 of mats wired parallel on 1 thermostat



Cut to fit length – simply cut along the dotted line



Ultra low EMF (electromagnetic frequency) levels



ETL listed for safety



Factory attached 4.5 meter electrical leads to each mat



Ready to install in 240v



Control Temperature with an available floor sensing thermostat



Energy efficient – radiates heat



Fast installation – simple roll out install



Tile Over using approved tile adhesives

PRODUCT OVERVIEW

Quietwarmth peel n stick radiant heat film for glued floors is an exciting new product from the manufacturers of Quietwalk underlayment. We have taken our vision to expand simplicity and quality by partnering with Calorquie's unique patented radiant heat technology. It is ideally suited for glue down floors, but can be used for floating floors. Peel n Stick the heating film directly to your substrate.

Installation Methods -

Glue down floors (refer to install manual)

1. make sure your substrate is flat. A maximum of 2mm variation is a good tolerance. Self level if needed.
2. clean floor surface and ensure there is no rubbish in the way and sponge clean. Allow to dry completely.
3. position the film on the floor and the peel back the release layer and adhere to the floor.
3. Install choice of glue down or float over the top according to its manufactures installation.
4. Follow the Quietwarmth tile installation manual to install the heat film and have a licensed electrician.

Technical Data

Weight	- 51 grams / .092 m2
Thickness	- 0.8 mm
Anti Fracture membrane Crack isolation	- 10 mm
Peel strength	- 20 PSI
Calorquie's unique patented radiant heat technology	

Limitations

Quietwarmth Tile:

1. NOT SUITABLE for use under carpet and nailed down wood floors.
2. DO NOT install quietwarmth tile floor heat in walls
3. MUST be installed by qualified installers and wired by licensed electricians. (please read installation manual for this information)

Approved Floor Covering Materials

1. ceramic tile
2. Porcelain tile
3. Laminate
4. Timber
5. Floating Floors

* refer to the manufacturer for compatibility with under floor heating

*please email our technical department for substrate compatibility if unsure. - info@auslayindustries.com.au

Packaging

Quietwarmth tile is packaged in

2.78 m2- (914mm x 3048mm), 1.39 m2- (914mm x 1524mm), 0.69 m2- (457mm x 1524mm) films

Warranty

The Quietwarmth tile floor film is certified to the highest international standards and come with a

25 YEAR LIMITED WARRANTY

Easy Installation, install floating floor coverings the same day !



QUIETwarmth®



Please refer to the
Quietwarmth Tile peel n stick install manual below

<http://www.auslayindustries.com.au>



Made in the USA by :
www.mpglobalproducts.com



Proudly imported and distributed in Australia By



www.auslayindustries.com.au

info@auslayindustries.com.au

07.12.2023